



SAV-120-DBU55-610




Australian owned
and designed



- Dual 305-watt, Mono PV panel (Stand alone tilt frame included)
- Dual SAV-120 Fans
- Low Noise Nylon fan blade, 23-inch, Steep Angle
- 26VDC motor, High Torque
- Powdercoated Shroud
- Stainless steel mesh and screw hardware
- Air flow rate = Nominal Solar 15,000 m³/hour
Typical Solar 22,440. m³/hour
Convection 700 m³/hour
- Dual 12V Battery Backup- 24VDC 55Ah (Battery Box Included)
- Victron Charge Controller with Bluetooth connectivity (with On/Off)
- Charge controller set up and monitoring App
- Voltage regulator
- Adjustable Electronic thermostat shut-off
- Large rigid base plate = 900mm x 900mm
- 10 year warranty on PV panel
- 3 year warranty on motor
- 3 year warranty on charge controller
- Fan Unit 45Kgs each

Configuration

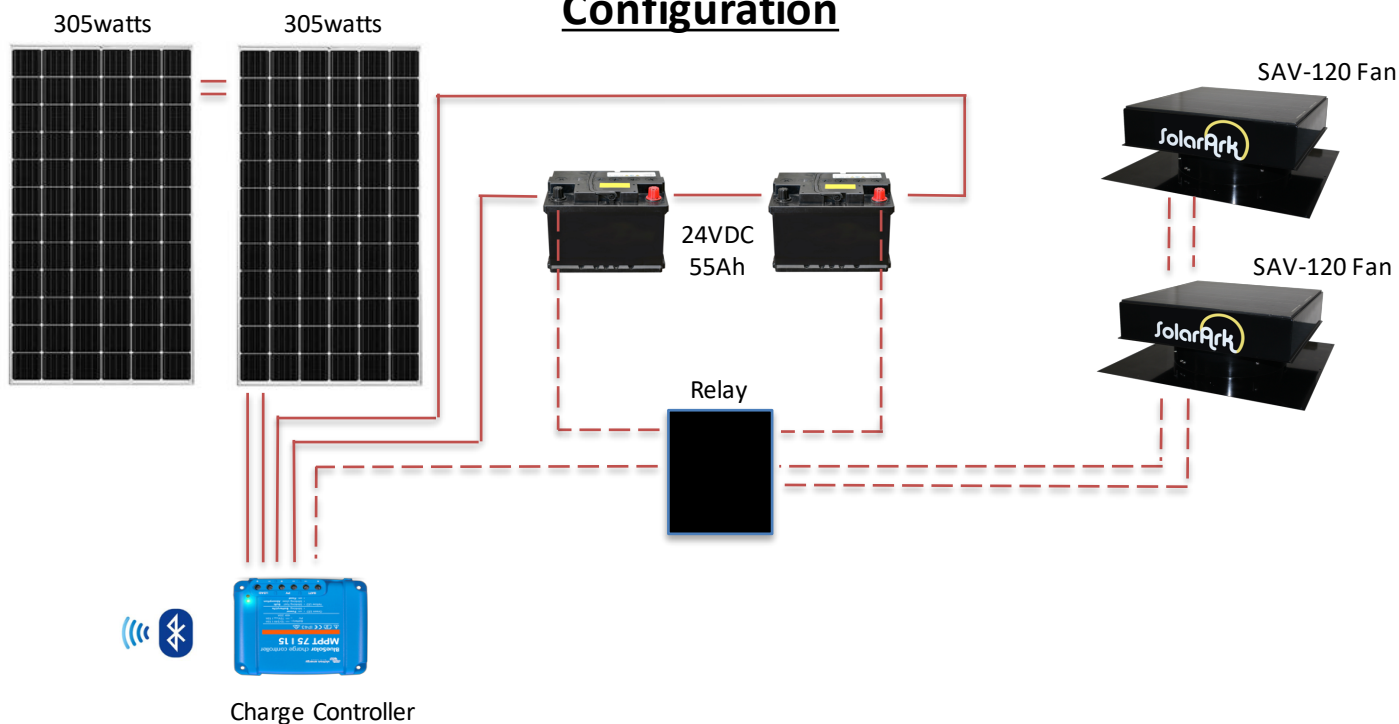

LARGE INDUSTRIAL APPLICATIONS

W: SOLARARK.COM.AU
P: 1300 670 966
E: INFO@SOLARARK.COM.AU



POWER



VENTILATION



AIR CONDITIONING



HOT WATER