




COMMERCIAL APPLICATIONS

- 40-watt, Poly-silicon PV panel, Tilt Adjustable
- High Performance
- DC motor, High Torque
- Powdercoated Shroud
- Stainless steel mesh and screw hardware
- Air flow rate = Maximum Solar 3,660 m³/hour
Convection 350 m³/hour
- Low Noise Nylon fan blade, 30mm, Steep Angle
- Automatic thermostat shut-off, 24 Degrees C
- Large rigid base plate = 700mm x 700mm
- 10 year warranty including PV panel
- 3 year warranty on motor
- 17Kgs

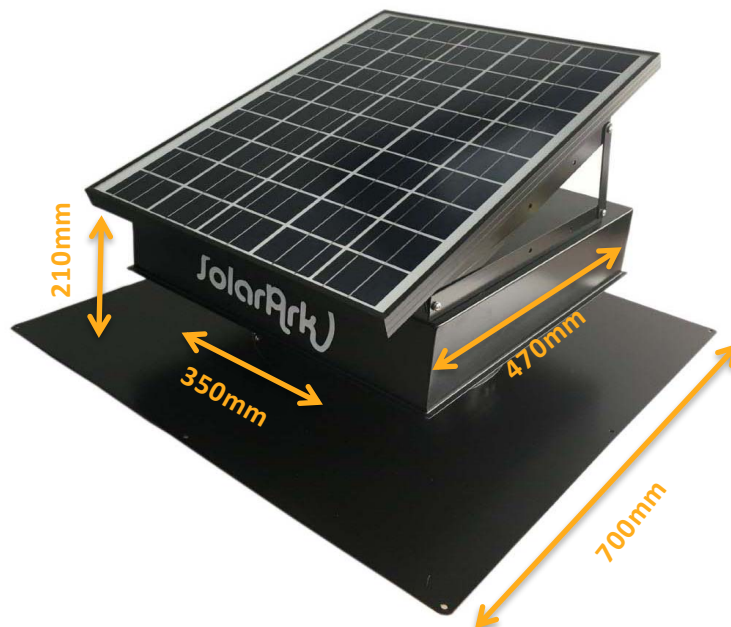

W: SOLARARK.COM.AU
P: 1300 670 966
E: INFO@SOLARARK.COM.AU

SolarArk



POWER



VENTILATION



AIR CONDITIONING



HOT WATER